

Technical Data

14mm LOC Herringbone Oak


Brushed Matt Lacquered | ENG-OAK-2063



Product Photo:



Board Construction:

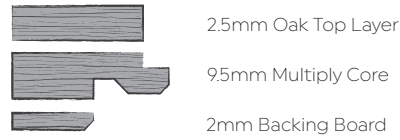

Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	110mm
Board Length:	660mm
Pack Size:	0.50m ²
Pack Weight:	4.33g
Packs Per Pallet:	112

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	500 kg/m ³
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.14 W/mK

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Matt Lacquered
Bevel Detail:	4V Bevel
Density of Finish: According to EN13489 Testing Brinell (EN1534)	Average Hardness 37 MPa
Fix System:	Optilock
Grade:	Rustic
Core Material:	Pine
Janka Reading:	1360

Misc Items:

Residential Warranty:	30 Years
Commercial Warranty:	5 Years
Oak Origin:	Europe
Manufactured In:	Poland / Ukraine
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



Timba Floors & Boards is a trading style of B2B Wood Products Ltd.

©Copyright 2022

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.

Technical Data


14mm LOC Herringbone Oak
Brushed White Oak | ENG-OAK-2064



Product Photo:



Board Construction:

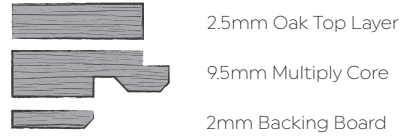

Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	110mm
Board Length:	660mm
Pack Size:	0.50m ²
Pack Weight:	4.33g
Packs Per Pallet:	112

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	500 kg/m ³
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.14 W/mK

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Lacquered
Bevel Detail:	4V Bevel
Density of Finish: According to EN13489 Testing Brinell (EN1534)	Average Hardness 37 MPa
Fix System:	Optilock
Grade:	Rustic
Core Material:	Pine
Janka Reading:	1360

Misc Items:

Residential Warranty:	30 Years
Commercial Warranty:	5 Years
Oak Origin:	Europe
Manufactured In:	Poland / Ukraine
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



Timba Floors & Boards is a trading style of B2B Wood Products Ltd.

©Copyright 2022

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.

Technical Data


14mm LOC Herringbone Oak

French Chateau Oak: Brushed & Matt Lacquered | ENG-OAK-2065

Product Photo:



Board Construction:

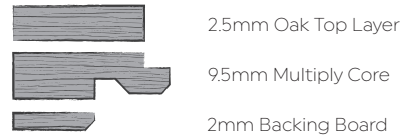

Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	110mm
Board Length:	660mm
Pack Size:	0.50m ²
Pack Weight:	4.33g
Packs Per Pallet:	112

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	500 kg/m ³
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.14 W/mK

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Lacquered
Bevel Detail:	4V Bevel
Density of Finish: According to EN13489 Testing Brinell (EN1534)	Average Hardness 37 MPa
Fix System:	Optilock
Grade:	Rustic
Core Material:	Pine
Janka Reading:	1360

Misc Items:

Residential Warranty:	30 Years
Commercial Warranty:	5 Years
Oak Origin:	Europe
Manufactured In:	Poland / Ukraine
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



Technical Data


14mm LOC Herringbone Oak

Smoked Oak: Brushed & Matt Lacquered | ENG-OAK-2066

Product Photo:



Board Construction:

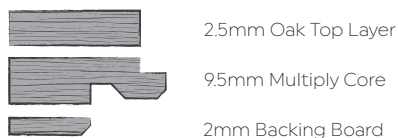

Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	110mm
Board Length:	660mm
Pack Size:	0.50m ²
Pack Weight:	4.33g
Packs Per Pallet:	112

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	500 kg/m ³
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.14 W/mK

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Matt Lacquered
Bevel Detail:	4V Bevel
Density of Finish: According to EN13489 Testing Brinell (EN1534)	Average Hardness 37 MPa
Fix System:	Optilock
Grade:	Rustic
Core Material:	Pine
Janka Reading:	1360

Misc Items:

Residential Warranty:	30 Years
Commercial Warranty:	5 Years
Oak Origin:	Europe
Manufactured In:	Poland / Ukraine
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



Technical Data

14mm LOC Herringbone Oak


Invisible: Natural Oiled | ENG-OAK-2067



Product Photo:



Board Construction:

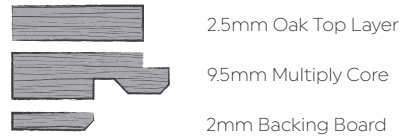

Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	110mm
Board Length:	660mm
Pack Size:	0.50m ²
Pack Weight:	4.33g
Packs Per Pallet:	112

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	500 kg/m ³
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.14 W/mK

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Natural Oiled
Bevel Detail:	4V Bevel
Density of Finish: According to EN13489 Testing Brinell (EN1534)	Average Hardness 37 MPa
Fix System:	Optilock
Grade:	Rustic
Core Material:	Pine
Janka Reading:	1360

Misc Items:

Residential Warranty:	30 Years
Commercial Warranty:	5 Years
Oak Origin:	Europe
Manufactured In:	Poland / Ukraine
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



Timba Floors & Boards is a trading style of B2B Wood Products Ltd.

©Copyright 2022

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.