


Technical Data

14 x 150mm T&G Engineered Oak
Brushed & Oiled | ENG-OAK-1411

Product Photo:



Board Construction:

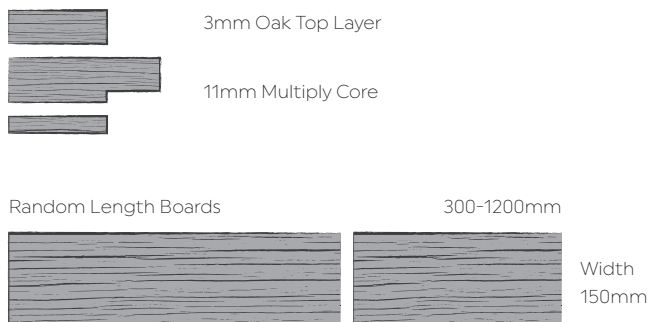

Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	150mm
Board Length:	Random Lengths (300-1200mm)
Pack Size:	1.80m ²
Pack Weight:	12.5kg
Packs Per Pallet:	48

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Multi-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	650 kg/m ³
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.16 W/mK

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Matt Lacquered
Bevel Detail:	4V Bevel
Density of Finish:	NPD
Fix System:	T&G
Grade:	Rustic
Core Material:	Eucalyptus & Poplar
Janka Reading:	1360

Misc Items:

Residential Warranty:	On Request
Commercial Warranty:	On Request
Oak Origin:	Europe
Manufactured In:	PRC
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



Technical Data


14 x 150mm T&G Engineered Oak
Brushed Matt Lacquered | ENG-OAK-1412



Product Photo:



Board Construction:

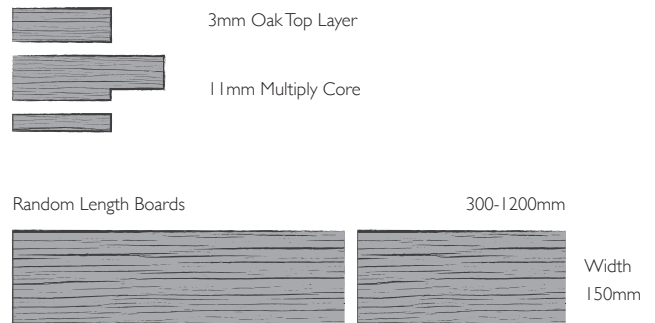

Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	150mm
Board Length:	Random Lengths (300-1200mm)
Pack Size:	1.80m ²
Pack Weight:	12.5kg
Packs Per Pallet:	48

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Multi-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	650 kg/m ³
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.16 W/mK

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Matt Lacquered
Bevel Detail:	4V Bevel
Density of Finish:	NPD
Fix System:	T&G
Grade:	Rustic
Core Material:	Eucalyptus & Poplar
Janka Reading:	1360

Misc Items:

Residential Warranty:	On Request
Commercial Warranty:	On Request
Oak Origin:	Europe
Manufactured In:	PRC
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



Timba Floors & Boards is a trading style of B2B Wood Products Ltd.

©Copyright 2022

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.

Technical Data

14 x 150mm T&G Engineered Oak


Brushed & Whitewashed Grey Oiled | ENG-OAK-1413



Product Photo:



Board Construction:

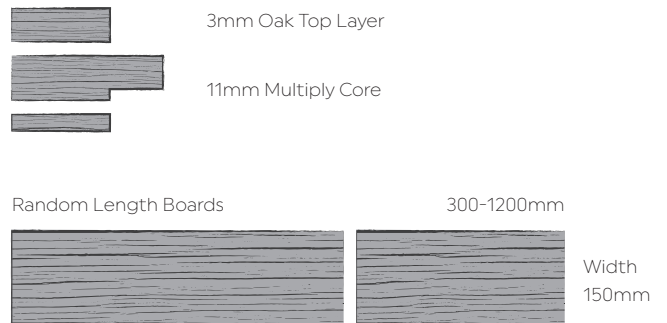

Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	150mm
Board Length:	Random Lengths (300-1200mm)
Pack Size:	1.80m ²
Pack Weight:	12.5kg
Packs Per Pallet:	48

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Multi-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	650 kg/m ³
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.16 W/mK

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Matt Lacquered
Bevel Detail:	4V Bevel
Density of Finish:	NPD
Fix System:	T&G
Grade:	Rustic
Core Material:	Eucalyptus & Poplar
Janka Reading:	1360

Misc Items:

Residential Warranty:	On Request
Commercial Warranty:	On Request
Oak Origin:	Europe
Manufactured In:	PRC
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



Timba Floors & Boards is a trading style of B2B Wood Products Ltd.

©Copyright 2022

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.