


# Technical Data



14mm T&G Chevron Oak

Brushed & Matt Lacquered | ENG-OAK-2070

## Product Photo:

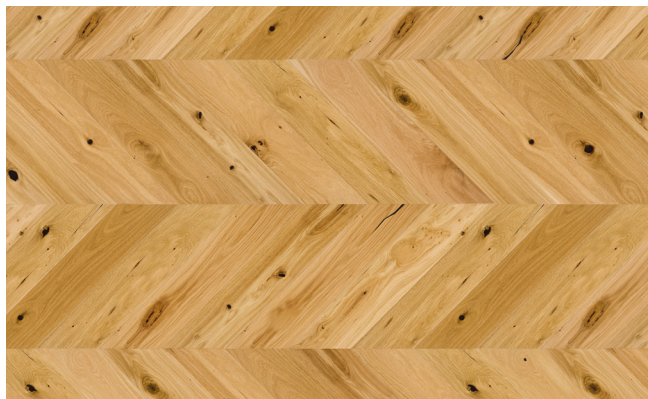

## Board Construction:

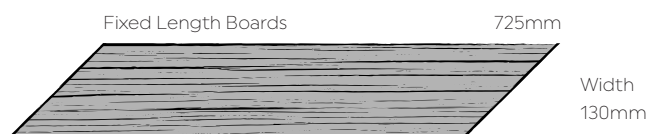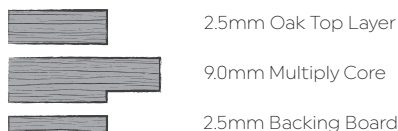

## Product Specification & Handling Information:

|                   |                     |
|-------------------|---------------------|
| Board Depth:      | 14mm                |
| Board Width:      | 130mm               |
| Board Length:     | 725mm               |
| Pack Size:        | 0.610m <sup>2</sup> |
| Pack Weight:      | 5.31kg              |
| Packs Per Pallet: | 56                  |

## Manufacturer Testing Standard:

|                       |   |
|-----------------------|---|
| Standard:             | EN14342:2013 - Three-layer Flooring Board |
| Reaction to Fire:     | Dfl - s1                                  |
| Minimum Density:      | 500 kg/m <sup>3</sup>                     |
| Minimum Thickness:    | 14mm                                      |
| Formaldehyde:         | E-1                                       |
| Thermal Conductivity: | 0.14 W/mK                                 |

## Board Detail:

|  |                          |
|--|--------------------------|
| Type of Board:   | Engineered Wood Flooring |
| Finish:  | Brushed & Matt Lacquered |
| Bevel Detail:  | 4V Bevel                 |
| Density of Finish:<br>According to EN13489<br>Testing Brinell (EN1534) | Average Hardness 37 MPa  |
| Fix System:  | T&G                      |
| Grade:   | Rustic                   |
| Core Material:   | Pine                     |
| Janka Reading:   | 1360                     |

## Misc Items:

|                       |  |
|-----------------------|--|
| Residential Warranty: | 30 Years   |
| Commercial Warranty:  | On Application   |
| Oak Origin:           | Europe   |
| Manufactured In:      | Poland / Ukraine   |
| Installation Type:    | <input checked="" type="checkbox"/> Float  |
|                       | <input checked="" type="checkbox"/> Bond   |
|                       | <input checked="" type="checkbox"/> Nail   |
| Underfloor Heating:   | Suitable for underfloor heating provided it is fitted in accordance with manufacturers instructions - Manifold temp must not exceed 29°C |

## Key Features:



## Accreditations:

