

# Technical Data


14 x 180mm 5G Engineered Oak

Smoked Oak: Brushed & Matt Lacquered | ENG-OAK-2060

## Product Photo:



## Board Construction:

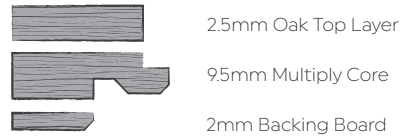

## Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	180mm
Board Length:	1800mm
Pack Size:	2.268m <sup>2</sup>
Pack Weight:	18.31kg
Packs Per Pallet:	40

## Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	500 kg/m <sup>3</sup>
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.14 W/mK

## Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Matt Lacquered
Bevel Detail:	4V Bevel
Density of Finish: According to EN13489 Testing Brinell (EN1534)	Average Hardness 37 MPa
Fix System:	Välinge 5Gc LOC
Grade:	Premium
Core Material:	Pine
Janka Reading:	1360

## Misc Items:

Residential Warranty:	20 Years
Commercial Warranty:	On Application
Oak Origin:	Europe
Manufactured In:	Poland / Ukraine
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 29°C

## Key Features:



## Accreditations:

